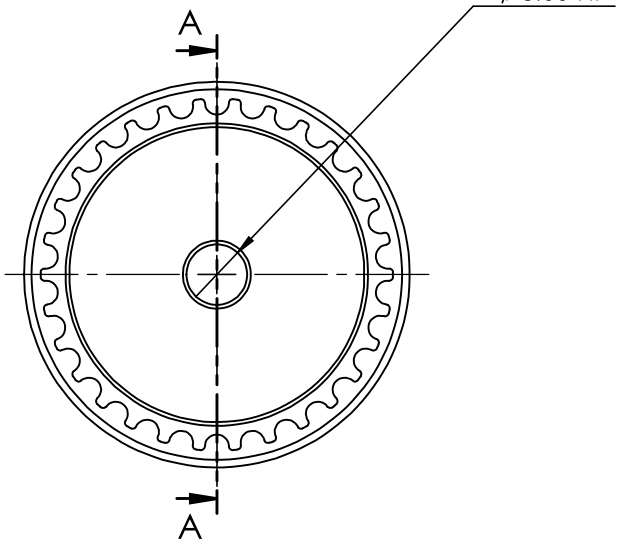

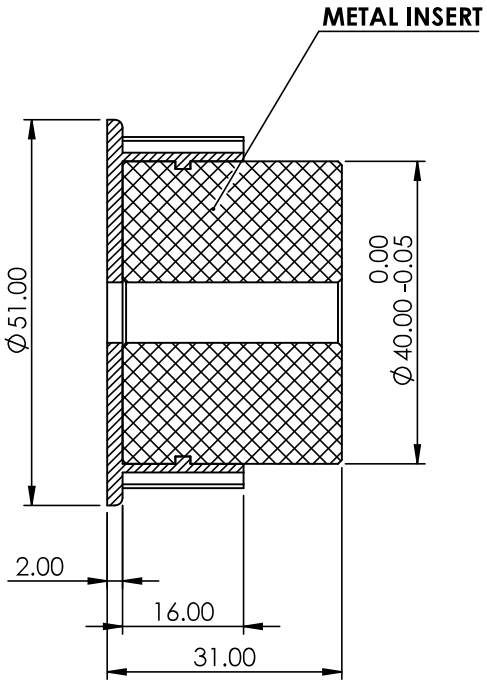

SECTION A-A



CORE PIN ∅	COMPANY
∅8	TPPL
∅20	AALIDRA

GENERAL TOLERANCE'S FOR DIMENSIONS AND FORM POSITION (Ref. ISO 2768 sk)

	DEVIATIONS FOR LINEAR DIMENSIONS RANGE OF NOMINAL DIEMENSIONS							
ABOVE	0.5	3	6	30	120	315	1000	2000
UPTO	3	6	30	120	315	1000	2000	4000
TOL.	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2

	DEVIATIONS FOR ANGULAR DIMENSIONS RANGE OF NOMINAL DIEMENSIONS			
ABOVE	–	10	50	120
UPTO	10	50	120	–
TOL.	±1°	±30'	±20'	±10'

DEVIATIONS FOR RADI AND CHAMFERS RANGE OF NOMINAL DIMENSIONS				
	0.5	3	6	30
	3	6	30	120
TOL.	±0.2	±0.5	±1	±2

IF IN DOUBT. ASK

DEVIATIONS FOR GEOMETRY							
ABOVE	—	10	30	100	300	1000	
UPTO	10	30	100	300	1000	3000	
▱	0.05	0.1	0.2	0.4	0.6	0.8	
⊥	0.4	0.4	0.4	0.6	0.8	1	
=	0.6	0.6	0.6	0.6	0.8	1	
↗	0.2	0.2	0.2	0.2	0.2	0.2	

	NAME	DATE
DRAWN	MANOJ	12/12/21
CHK'D	MILLIND	12/12/21
APPV'D	KARVE	12/12/21

PROPRIETARY & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TUFFPLAST ANY REPRODUCTION IN PART IS PROHIBITED.

MATERIAL:

WEIGHT:

DO NOT SCALE

TUFF PLAST PUNE PVT. LTD.

DATE		REVISION

MODEL NAME
30-5M pulley-insert

DWG NO./PART NO.
30-5M pulley-insert

A4

SHEET 1 OF 2